
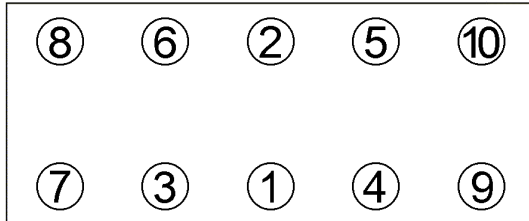


<b>Anziehvorschrift für Zylinderkopf</b>	<b>626.727</b>	 Das Original
<b>Tightening Instructions for Cylinder Head</b>		
<b>Instructions de serrage pour culasse</b>		
<b>Prescripciones de apriete para culatas</b>		
passend für / suitable for adaptable à / adaptable a		<b>Fiat/Lancia/Alfa Romeo</b>

Schraubenkopf / Head shape      Anziehreihenfolge/Tightening sequence/Ordre de serrage/Orden de apriete  
Tête de vis / Cabeza de tornillo



152.080  
M 10x1,25x254



Anziehen/	*	20 Nm
Tightening/		40 Nm
Serrage/	➤	90°
Apriete	➤	90°
	➤	90°

Zeichenerklärung / Explanations / Explication / Explicacion

*	neue Zylinderkopfschrauben verwenden	use new cylinder head bolts	utiliser des vis neuves	emplar tornillos nuevos
★	Warmlauf (80°C)	warm up time (80°C)	chauffage (80°C)	calentamiento (80°C)
□	Schrauben einzeln lösen und wieder anziehen	loosen and tighten each bolt	deserrer et serrer vis par vis	aflojar y apretar tornillo a tornillo
●	Setzzeit	relaxation time	durée de tassement	tiempo de espera
➤	Drehwinkel	torque angle	angle de serrage	ángulo de giro

**Motortyp / Engine type / Type de moteur / Tipo de motor**

0,49 mm ⚙

Barchetta, N. Punto, Stilo                      1,8 Ltr.

Mot. 188.A6.000, 192.A4.000

Lybra    1,8 Ltr.

Alfa 147, 156, 166                                  1,6-2,0 Ltr.

Mot. AR 32104, AR 37203, AR 32205, AR 36301

ElringKlinger AG, Max-Eyth-Str.2  
72581 Dettingen / Erms. Tel. 07123/724 601

**\*626.727\***